
GALLERY® collection 3-LAYER CONSTRUCTION





GALLERY collection

The Gallery® Collection three-layer construction provides exceptional strength, energy efficiency and dent resistance as well as a beautiful carriage house appearance. The 2" or 1-3/8" thickness of Intellicore® polyurethane or bonded polystyrene insulation and thermal break makes these doors heat and cold resistant while the tongue-and-groove joint helps seal out wind, rain and snow. Available in short and long panels with multiple window options, the three-layer Gallery® Collection is virtually maintenance-free, so the first fabulous impression becomes a lasting impression.

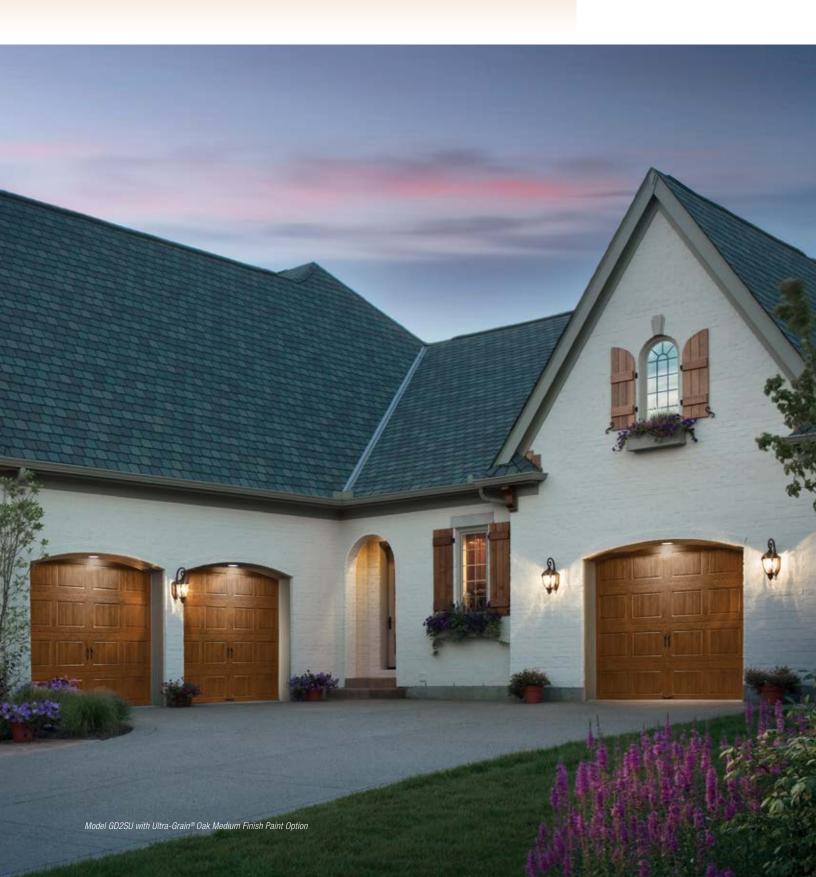

Warmer. Quieter. Stronger.

Gallery® Collection doors featuring Intellicore® insulation technology represent the ultimate smart choice for homeowners.

Clopay's Intellicore® is a proprietary polyurethane foam that is injected into a garage door, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, and with one of the industry's leading R-values of 18.4, it provides year-round comfort and improved energy efficiency. Smart, indeed.



3-Laver Construction GD1SU GD2SP GD1SP GD2SU & GD2LU & GD1LU & GD2LP & GD1LP **MODELS MODELS MODELS MODELS** 13/8" POLYSTYRENE INSULATION POLYSTYRENE INSULATION OLYURETHANE NSULATION 18.4 9.0 R-VALUE R-VALUE R-VALUE R-VALUE



COLORS



- Exterior steel on standard color doors has a natural woodgrain texture.
- Doors can be painted to match the home's exterior using a high-quality latex exterior paint.
 Do not use oil-based paint.
 - *Popular in select markets, Glacier White is a brighter white.
 † Additional charges apply.
 - Due to the printing process, colors may vary.

CUSTOM PAINT OPTION



Color Blast® offers more than 1,500 Sherwin-Williams® color options to complement your home. Clopay's durable two-part paint system has been thoroughly tested and is backed by a five-year warranty.

ULTRA-GRAIN® PAINT OPTION



Ultra-Grain® Oak Medium Finish



Ultra-Grain® Oak Dark Finish



Ultra-Grain® Oak Walnut Finish



Ultra-Grain® Oak Slate Finish

- Painted steel surface simulates a real stained door without the need of staining and the ongoing maintenance of wood.
- Oak woodgrain runs horizontal on stiles and vertical on panels for an authentic, natural look.
- Available in Medium, Dark, Walnut or Slate finishes that complement Clopay Entry Doors, shutters and other exterior stained wood products.
- Exterior steel surface on an Ultra-Grain® painted door has a stucco texture to create a more natural woodgrain appearance.
- Window frames, grilles and inserts are color matched to coordinate with the Ultra-Grain® patterns.
 All window options are available.

Additional charges apply.

SHORT PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

HEIGHTS

7'0"-8'0"

Illustrations simplified for clarity

14'10"-19'0'

Wrought Iron Arch*†

कर्क कर्क

कांद्र कांद्र कांद्र कांद्र

MODELS GD1SP, GD1SU,

GD2SP AND GD2SU WIDTHS 6'2"-7'6" 7'8"-10'0" Long Top Section Plain Short Plain Long REC12 REC14 ---- ---- ---- ----SQ22 SQ24 Trenton® Short† HO HE OUR DOC DOC DOC HEE HEE Trenton® Long† 000000 000000 200200 022000 022000 002200 Kristin® Short† Kristin® Long† Wrought Iron Short*† 96 96 96 96 58 98 98 98 98 98 98 Wrought Iron Long*1

14 10 - 19 0	192 -200	78-100 78-100
ARCH1		
Vertical Grille on ARCH1		
Grille on ARCH1		
ARCH2		
Vertical Grille on ARCH2		
Grille on ARCH2		
ARCH3		
Vertical Grille on ARCH3		
Grille on ARCH3		
Clayton™ Short [†]		
Clayton™ Long†		

19'2"-20'0"

10'6"-12'0'

7'8"-10'0"

9'0"-10'0"


7'8"-10'0'

^{*}Acrvlic

[†]Complements Clopay Entry Door glass.

LONG PANEL WINDOW DESIGNS AND TOP SECTION OPTIONS

MODELS GD1LP, GD1LU, GD2LP AND GD2LU

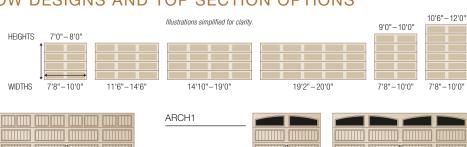

Short Top Section			ARCH1		
Plain Short			Vertical Grille on ARCH1		
Plain Long			Grille on ARCH1		al in al in
REC12			ARCH2		
	<u> </u>				
REC14			Vertical Grille		
			on ARCH2		
SQ22			Grille on ARCH2		
<u> </u>			GIIIIE OIT ANOT 12		
0004			A D 0 1 10		
<u>SQ24</u>			ARCH3		
Trenton® Short†	500 500 500 500		Vertical Grille on ARCH3		
	tt				
Trenton® Long†		000000 000000 000000 000000	Grille on ARCH3		
Kristin® Short†			Clayton [™] Short [†]		
Kristin® Long†			Clayton™ Long†		
Wrought Iron Short*†		88 88 88 88 88 88 88	Wrought Iron Arch*†	6360 6360	කෙසි කෙසි කෙසි
Wrought Iron Long*†	-				

*Acrylic

 $^{^{\}dagger}$ Complements Clopay Entry Door glass.

Windows





ARCH1

all like Vertical Grille on ARCH1



Grille on ARCH1



ARCH2

Vertical Grille on ARCH2

Grille on ARCH2











Kristin® Short'



Trenton® Short'





Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs.



Trenton® Long'



Clayton™ Long³

ACRYLIC



Wrought Iron Short



Wrought Iron Long*



Wrought Iron Arch'

Acrylic windows require special cleaning. Never use products that contain ammonia or petroleum products to clean acrylic. Please visit clopaydoor.com/acrylic for complete details.

*Complements Clopay Entry Door glass. Long and short windows may be used in any Gallery 3-layer model. Double-strength glass is standard. Optional obscure, 3/4" insulated and 3/4" insulated obscure glass is available on all Gallery 3-layer models. Additional charges for optional glass apply.

Clear acrylic also available.



Frosted



Seeded Obscure





Additional Features



Large authentic arch window designs. Ultra-Grain® window frames, grilles and inserts are color coordinated to Medium, Dark, Walnut and Slate finishes. 14 gauge steel hinges.



2" thick polystyrene doors and all Intellicore® doors come standard with 10-ball nylon rollers and heavy-duty



Clear

Energy-efficient thermal break. Polyurethane model shown.

- Hot-dipped galvanized steel interior and exterior skins with a baked-on primer and top coat help ensure a virtually maintenance-free door with long-lasting beauty.
- Replaceable vinvl bottom weatherseal in a rust-resistant aluminum retainer helps seal out the elements.
- 2" thick polystyrene doors and all Intellicore® doors comply with 2015 IECC air infiltration requirement of 0.40 cfm/ft² or less (IECC, Section C402.5.2).
- See your Clopay Dealer for WINDCODE® door availability.

Decorative Hardware

STANDARD



Note: Decorative hardware options vary based on door widths. Standard hardware is not provided if a lock is chosen. See your Clopay Dealer for details.

OPTIONAL







doors are compliant with:

Greenhouse Gas Emissions

California SB 1013





† Aluminum construction


Environmental Assurance

Clopay doors are compliant with environmental laws and

Canadian regulations amending the ozone-depleting

substances and halocarbon alternatives regulations

regulations. Clopay doors do not contain HFCs. All Clopay



*Door may not open properly if installed near the

top depending on opening dimensions and lift type. Spade Lift Handles and Spade Step Plate) See your Clopay Dealer for more details.

Washington HB 1112 – Hydrofluorocarbon

Warranties









For more detailed product specification information or availability of our Gallery® Collection Garage Doors, please contact your Clopay Dealer. To locate a dealer to help you select the right door for your home, just go to www.clopaydoor.com/dealer or call 1-800-2CLOPAY (225-6729).

Follow us on 🚮 🖸 💟 👂 🛅 in 🎯











